


Stranded Loose Tube Light-armored Cable

Model No.: ASKA-LTLA-*

Fiber cores: from 2 to 288 (increased by 2 fibers)

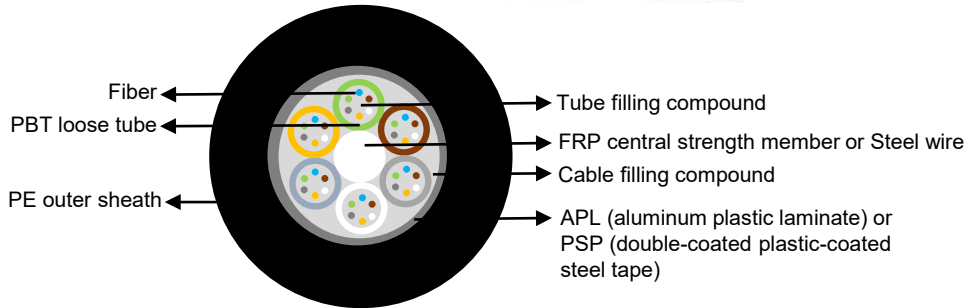

Temperature Range

- ❖ Transport/Storage temp. -40°C~ +70 °C
- ❖ Installation Temp.: -30°C~ +50 °C
- ❖ Operation Temp.: -40°C~ +70 °C

Cable Structural Characteristics

- ❖ Sheath: Anti-tracking (AT) material or Polyethylene(PE)
- ❖ Fiber count: from 2 to 288 fiber
- ❖ Loose tube: colored fiber in PBT loose tube, filled with fiber compound
- ❖ Central strength member: Non-metallic strength member FRP(Fiber Reinforce Plastic Rod) or Steel wire
- ❖ Waterproof layer: Cable core filled with cable compound
- ❖ High-strength APL/PSP: Offers very high tensile strength, small diameter and light weight, enhance moisture-proof

Technical Data

Attenuation	G652	≤0.36dB/km @1310nm	≤0.22dB/km @1550nm
	G655	≤0.40dB/km @1310nm	≤0.23dB/km @1550nm
	50/125	≤3.3dB/km @850nm	≤1.2dB/km @1300nm
	62.5/125	≤3.5dB/km @850nm	≤1.2dB/km @1300nm

Max Allowable working Tension	600N/1500N	
Short-term Crush Resistance	300N/100mm ,1000N /100mm	
Min. bending radius(mm) D: cable diameter	Static	10D
	Dynamic	20D


Remark: all sizes and performance values can be specified by customer

ASKA COMMUNICATION CORP.
 3034 NW 82ND AVE,DORAL, FL. 33122, U.S.A.
 Phone: 954-708-2387 Email: linda@askacom.com
www.askscom.com

Stranded Loose Tube armored Cable

Model No.: ASKA-LTAC-*

Fiber cores: from 2 to 216 (increased by 2 fibers)

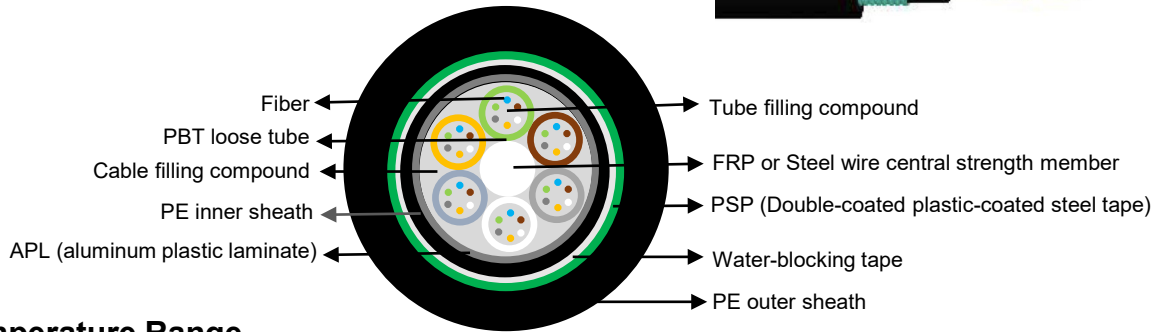

Temperature Range

- ❖ Transport/Storage temp. -40°C~ +70 °C
- ❖ Installation Temp.: -30°C~ +50 °C
- ❖ Operation Temp.: -40°C~ +70 °C

Cable Structural Characteristics

- ❖ Sheath: Anti-tracking (AT) material or Polyethylene(PE)
- ❖ Fiber count: from 2 to 216 fiber
- ❖ Loose tube: colored fiber in PBT loose tube, filled with fiber compound
- ❖ Central strength member: Non-metallic strength member FRP(Fiber Reinforce Plastic Rod) or Steel wire
- ❖ Waterproof layer: Cable core filled with cable compound, Water-blocking tape
- ❖ High-strength APL/PSP: Offers very high tensile strength, small diameter and light weight, enhance moisture-proof

Technical Data

Attenuation	G652	≤0.36dB/km @1310nm	≤0.22dB/km @1550nm
	G655	≤0.40dB/km @1310nm	≤0.23dB/km @1550nm
	50/125	≤3.3dB/km @850nm	≤1.2dB/km @1300nm
	62.5/125	≤3.5dB/km @850nm	≤1.2dB/km @1300nm

Max Allowable working Tension	1000N/3000N	
Short-term Crush Resistance	1000N/100mm ,3000N /100mm	
Min. bending radius(mm) D: cable diameter	Static	12.5D
	Dynamic	25D


Remark: all sizes and performance values can be specified by customer

ASKA COMMUNICATION CORP.
 3034 NW 82ND AVE,DORAL, FL. 33122, U.S.A.
 Phone: 954-708-2387 Email: linda@askacom.com
www.askscom.com

Stranded Loose Tube Single-steel-wire armored Cable

Model No.: ASKA-LTSSW-*

Fiber cores: from 2 to 36 (increased by 2 fibers)

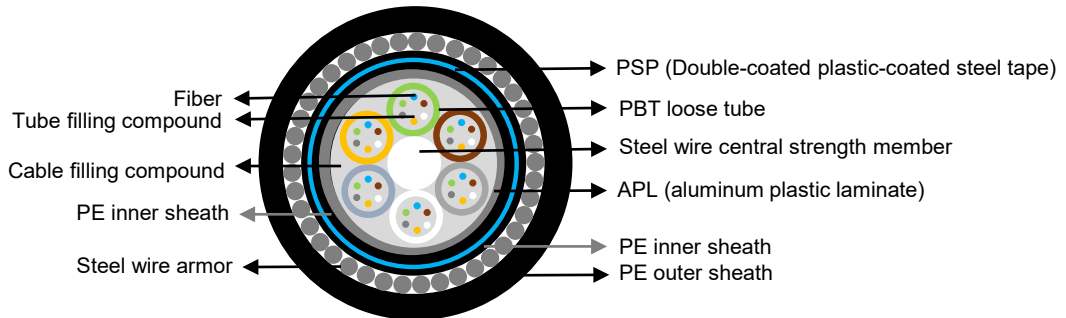

Temperature Range

- ❖ Transport/Storage temp. -40°C~ +70 °C
- ❖ Installation Temp.: -30°C~ +50 °C
- ❖ Operation Temp.: -40°C~ +70 °C

Cable Structural Characteristics

- ❖ Sheath: Anti-tracking (AT) material or Polyethylene(PE)
- ❖ Fiber count: from 2 to 36 fiber
- ❖ Loose tube: colored fiber in PBT loose tube, filled with fiber compound
- ❖ Central strength member: Steel wire
- ❖ Waterproof layer: Cable core filled with cable compound, Water-blocking tape
- ❖ High-strength APL/PSP: Offers very high tensile strength, small diameter and light weight, enhance moisture-proof
- ❖ Single-steel armor ensures good performance of tensile strength
- ❖ Suitable for direct buried, climb or underwater installation

Technical Data

Attenuation	G652	≤0.36dB/km @1310nm	≤0.22dB/km @1550nm
	G655	≤0.40dB/km @1310nm	≤0.23dB/km @1550nm
	50/125	≤3.3dB/km @850nm	≤1.2dB/km @1300nm
	62.5/125	≤3.5dB/km @850nm	≤1.2dB/km @1300nm

Max Allowable working Tension	4000N/10000N	
Short-term Crush Resistance	3000N/100mm ,5000N /100mm	
Min. bending radius(mm) D: cable diameter	Static	12.5D
	Dynamic	25D


Remark: all sizes and performance values can be specified by customer

ASKA COMMUNICATION CORP.
 3034 NW 82ND AVE,DORAL, FL. 33122, U.S.A.
 Phone: 954-708-2387 Email: linda@askacom.com
www.asksc.com

Uni Tube Light-armored Cable

Model No.: ASKA-ULAC-*

Fiber cores: from 2 to 24

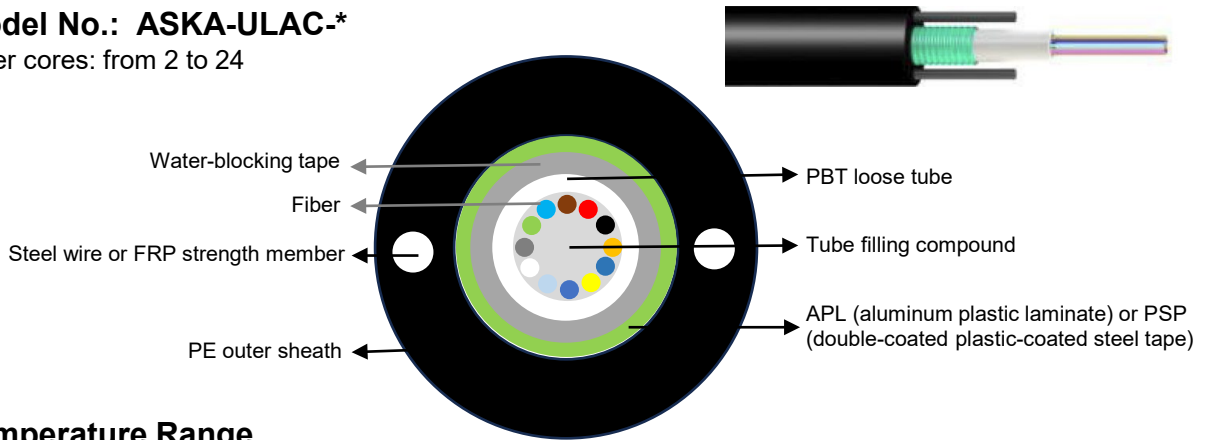

Temperature Range

- ❖ Transport/Storage temp. -40°C~ +70 °C
- ❖ Installation Temp.: -30°C~ +50 °C
- ❖ Operation Temp.: -40°C~ +70 °C

Cable Structural Characteristics

- ❖ Good mechanical and temperature performance
- ❖ High strength loose tube that is hydrolysis resistant
- ❖ Special tube filling compound ensure a critical protection of fiber
- ❖ Special designed compact structure is good at preventing loose tubes from shrinking
- ❖ Crush resistance and flexibility
- ❖ Polyethylene(PE) sheath protects cable from ultraviolet radiation
- ❖ Two parallel steel wires /FRP ensure tensile strength
- ❖ Small diameter, light weight and friendly installation
- ❖ APL or PSP enhancing moisture-proof

Technical Data

Attenuation	G652	≤0.36dB/km @1310nm	≤0.22dB/km @1550nm
	G655	≤0.40dB/km @1310nm	≤0.23dB/km @1550nm
	50/125	≤3.3dB/km @850nm	≤1.2dB/km @1300nm
	62.5/125	≤3.5dB/km @850nm	≤1.2dB/km @1300nm

Max Allowable working Tension (long/short term)	600N/1500N, 1000N/3000N	
Short-term Crush Resistance (long/short term)	1000N/100mm ,3000N /100mm	
Min. bending radius(mm) D: cable diameter	Static	10D
	Dynamic	20D

Remark: all sizes and performance values can be specified by customer

ASKA COMMUNICATION CORP.
 3034 NW 82ND AVE,DORAL, FL. 33122, U.S.A.
 Phone: 954-708-2387 Email: linda@askacom.com
www.askscom.com

Fiber G.652D

G.652D fiber characteristics (ITU-G.652)

Category	Description	Specifications	
Optical Specifications	Attenuation	④ 1310nm	≤0.35dB/km
		④ 1383nm	≤0.30dB/km
		④ 1490nm	≤0.24dB/km
		④ 1550	≤0.20dB/km
		④ 1625	≤0.23dB/km
	Attenuation Non-uniformity	④ 1310nm,1550nm	≤0.05dB
	Point Discontinuity	④ 1310nm,1550nm	≤0.05dB
	Attenuation vs Wavelength	④ 1285nm-1330nm	≤0.03dB/km
		④ 1525nm-1575nm	≤0.02dB/km
	Zero Dispersion Wavelength		1310nm-1324nm
	Zero Dispersion Slope		≤0.092ps/(nm ² · km)
	Dispersion	④ 1550nm	≤18ps/(nm · km)
		④ 1625nm	≤22ps/(nm · km)
	PMD Link Design Value (m=20 Q=0.01%)		≤0.06ps√km
	Maximum Individual Fiber		≤0.1ps√km
Cable Cut-off wavelength(λ _{cc})		≤1260nm	
Macro Bending Loss (1turn; Φ 32mm)	④ 1550	≤0.30dB	
Macro Bending Loss (100turns; Φ 50mm)	④ 1310nm	≤0.30dB	
	④ 1550nm	≤0.30dB	
Macro Bending Loss (100turns; Φ 60mm)	④ 1625nm	≤0.30dB	
Mode Field Diameter	④ 1310nm	9.2 ± 0.4μm	
	④ 1550nm	10.4 ± 0.5μm	
Dimensional Specifications	Fiber Curf Radius	≥4.0m	
	Cladding Diameter	125 ± 0.7μm	
	Core / Clad Concentricity	≤0.5μm	
	Cladding Non-Circularity	≤0.7%	
	Coating Diameter	242 ± 5μm	
	Coating / Cladding Concentricity	≤12μm	
Mechanical Specifications	Proof Test	≥100kpsi(0.7GPa)	
	Fatigue Resistance Parameter (Nd)	≥20	

ASKA COMMUNICATION CORP.
 3034 NW 82ND AVE,DORAL, FL. 33122, U.S.A.
 Phone: 954-708-2387 Email: sales@askacom.com
www.askscm.com